
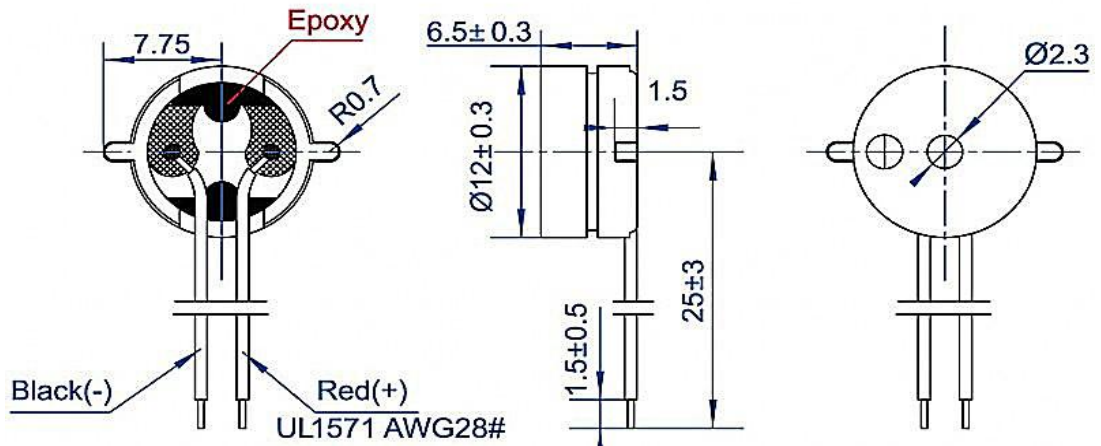


SPECIFICATION		
1	Model No.	EET1265W253-1.30-3.5-16-R
2	Rated Voltage (V)	1.3
3	Operating Voltage (V)	2~5
4	Resonant Frequency (Hz)	3200--3700
5	Coil Resistance (Ω)	16 \pm 3
6	*Sound Output at 30cm (dB)	\geq 85
7	*Current Consumption (mA)	\leq 30
8	Operating Temperature ($^{\circ}$ C)	-20~+70
9	Storage Temperature ($^{\circ}$ C)	-30~+85
10	Weight (g)	1.5
11	RoHs	Yes

THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003,Project Changzhou Esuntech Co l td

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

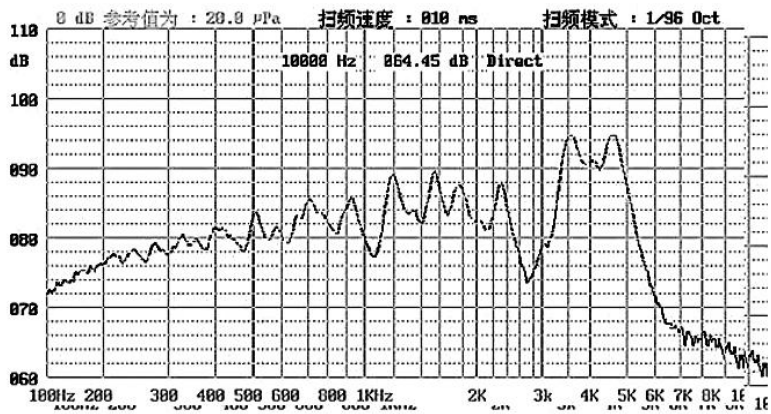

NOTES:
 1.ALL DIMENSIONS ARE IN MILLIMETERS
 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	A4	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn			EET1265W253-1.30-3.5-16-R		
	TRANSDUCER				Edition	Sheet	