



IES716-2GS

DIN-Rail Mounting or Wall Mounting

6-port 100M/Gigabit Layer 2 Managed Industrial Ethernet Switch

- Support 2 gigabit fiber ports(SFP slot) and 4 100M copper ports
- Adopt SW-Ring patent technology, support single ring, coupling ring, chain, Dual-homing, automatic recovery time of network failure < 20ms
- Gigabit bandwidth can enable high performance and speed transmission of large amounts of video, voice, and data
- Support dual power supplies, input power voltage: 12~48VDC
- Support – 40~75°C wide operating temperature range



Industrial Grade



RPS

Introduction

IES716-2GS is 6-port 100M/gigabit layer 2 managed industrial Ethernet switch. This product provides 100M copper ports and gigabit SFP slots, and adopts DIN-Rail or wall mounting which can meet the requirements of different scenes.

Network management system supports various network protocols and industrial standards, such as STP/RSTP, 802.1Q VLAN, QoS, IGMP Static Multicast, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Port Statistics, Access Control, Network Diagnosis, Rapid Configuration, Online Upgrading and so on. Moreover, it supports CLI, WEB, Telnet, SNMP and other access modes. It can provide users with good experience via friendly design of network management system interface, simple and convenient operation.

The input power supply is two independent power supply circuits which can ensure the normal operation of the device when one power supply fails. DIP switch can instantly restore factory defaults. When power supply or port has link failure, ALARM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, railway transportation, smart city, safe city, new energy, intelligent manufacturing and other industrial fields.

Features and Benefits


- ⊙ SNMPv1/v2c is used for network management of various levels
- ⊙ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⊙ QoS supports real-time traffic classification and priority setting
- ⊙ File management is convenient for rapid configuration and online upgrade of the device
- ⊙ Bandwidth management can reasonably distribute network bandwidth, preventing unpredictable network status
- ⊙ Port statistics can be used for the port real time traffic statistics
- ⊙ User password can conduct user hierarchical management to improve the device administrative security
- ⊙ Relay alarm is convenient for troubleshooting of construction site
- ⊙ Storm suppression can restrain broadcast, unknown multicast and unknown unicast
- ⊙ VLAN can simplify the network planning
- ⊙ Port trunking can increase network bandwidth and the reliability of network connection to achieve optimal bandwidth utilization
- ⊙ IGMP-Snooping and static multicast can be used for filtering multicast traffic to save

the network bandwidth

- ⦿ SW-Ring and STP/RSTP can achieve network redundancy, preventing network storm

Dimension

Unit:mm

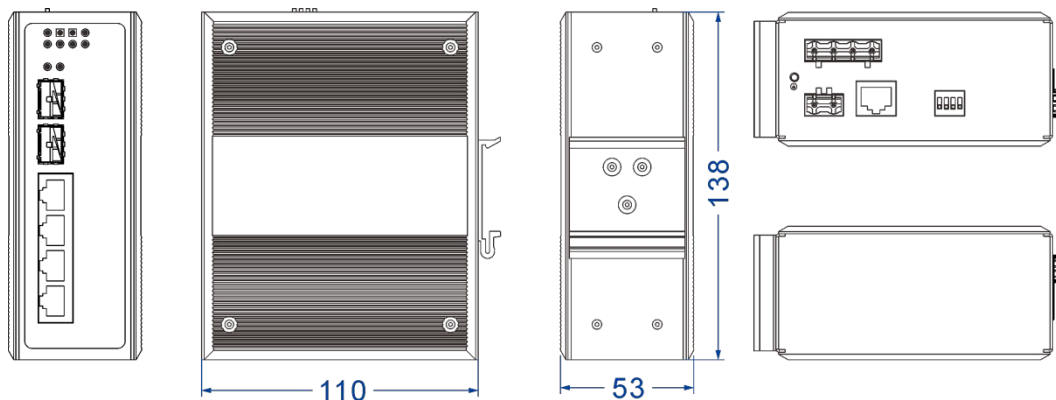

Specification

| | |
|---------------------|--|
| Standard & Protocol | IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1Q for VLAN IEEE 802.1p for CoS |
| Management | SNMP v1/v2c Centralized Management of Equipment, Port Mirroring, QoS, DHCP Client, File Management, Port Statistics |
| Security | Classification of User Permissions, Port Alarm , Power Supply Alarm |
| Switch Function | 802.1Q Vlan, Static Port Aggregation, Bandwidth Management, Flow Control |
| Unicast / Multicast | Static Multicast, IGMP-Snooping |
| Redundancy Protocol | SW-Ring, STP/RSTP |
| Interface | Copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, |

| | |
|-------------------------|--|
| | <p>Full/half Duplex Mode, MDI/MDI-X Autotuning</p> <p>SFP slot: 1000Base-SFP</p> <p>Console port: CLI command line management port (RS-232), RJ45</p> <p>Alarm port: 2-pin 7.62mm pitch terminal blocks, support 1 relay alarm output, current carrying capacity 1A@24VDC or 0.5A@120VAC</p> |
| LED Indicator | Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator |
| Switch Property | <p>Transmission mode: store and forward</p> <p>MAC address: 8K</p> <p>Packet buffer size: 1Mbit</p> <p>Backplane bandwidth: 7.6G</p> <p>Switch time delay: <10μs</p> |
| Power Requirement | <p>12~48VDC, 4-pin 7.62mm pitch terminal blocks</p> <p>Dual power supply redundancy, non-polarity, reverse connection protection</p> |
| Power Consumption | <p>No-load: ≤2.2W@24VDC</p> <p>Full-load: ≤5.5W@24VDC</p> |
| Environmental Limit | <p>Operating temperature: -40~75℃</p> <p>Storage temperature: -40~85℃</p> <p>Relative humidity: 5% ~ 95% (no condensation)</p> |
| Physical Characteristic | <p>Housing: IP40 protection, metal</p> <p>Installation: DIN-Rail mounting or wall mounting</p> <p>Dimension (W x H x D): 53mm×138mm×110mm</p> <p>Weight: 690g</p> |
| Industrial Standard | <p>IEC 61000-4-2 (ESD), Level 4</p> <ul style="list-style-type: none"> ● Air discharge: ±15kV ● Contact discharge: ±8kV <p>IEC 61000-4-5 (Surge), Level 4</p> <ul style="list-style-type: none"> ● Power supply: common mode±4kV, differential mode±2kV ● Ethernet port: ±2kV ● Relay: common mode±4kV, differential mode±2kV <p>Shock: IEC 60068-2-27</p> <p>Free fall: IEC 60068-2-32</p> <p>Vibration: IEC 60068-2-6</p> |

| | |
|---------------|---------------|
| Certification | CE, FCC, RoHS |
| Warranty | 5 years |

Ordering Information

| Available Models | Gigabit SFP Slot | 100M Copper Port | Power Supply Range |
|------------------|------------------|------------------|-------------------------------|
| IES716-2GS | 2 | 4 | 12~48VDC dual power supply |



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@ta.com

Website: www.ta.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by ta.