


## Supreme Metallized Polypropylene Film Capacitors – Axial – JPX

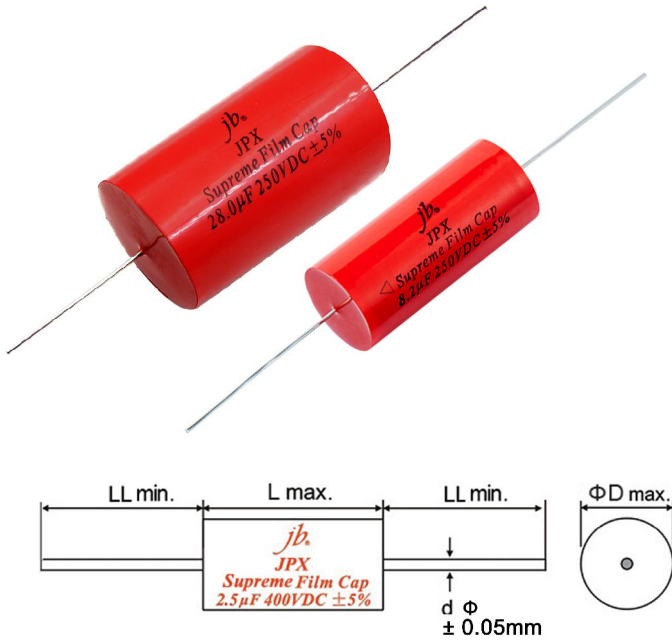

### FEATURES

- Quick transient design
- High Precise Capacitance  $\pm 3\%$ ,  $\pm 5\%$
- Very Low Dielectric absorption factor
- Very Low Dissipation factor
- Very Low ESR
- Very Low Inductance
- Excellent handling of high current audio pulses

### SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	0.1 ~ 100uF
Capacitance tolerance	$\pm 3\%$ , $\pm 5\%$ 1KHz
Rated voltage	250V, 400V, 630V.DC
Withstand voltage	1.6VR 5S
Dissipation factor	$\leq 0.0005$ 1KHz
Insulate the electric resistance	CR $\leq 0.33 \mu F$ , I.R $\geq 15,000M\Omega$ CR $> 0.33 \mu F$ , I.R $\geq 5,000S$
Leads Diameter	0.8, 1.0 Tinned Pure Copper Wire

### STANDARD SIZE (mm)

For 0.1uF to 1uF, please consult to our sales for size.

$\mu F$	250V					$\mu F$	250V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
1.0uF	$\leq 0.0005$	12.5	25	0.8	38	5.1uF	$\leq 0.0005$	21.5	31.5	0.8	38
1.1uF	$\leq 0.0005$	13	25	0.8	38	5.6uF	$\leq 0.0005$	22.5	31.5	0.8	38
1.2uF	$\leq 0.0005$	11.5	31.5	0.8	38	6.0uF	$\leq 0.0005$	23	31.5	0.8	38
1.3uF	$\leq 0.0005$	12	31.5	0.8	38	6.2uF	$\leq 0.0005$	23.5	31.5	0.8	38
1.5uF	$\leq 0.0005$	12.5	31.5	0.8	38	6.8uF	$\leq 0.0005$	24	31.5	0.8	38
1.6uF	$\leq 0.0005$	13	31.5	0.8	38	7.0uF	$\leq 0.0005$	19.5	46	0.8	38
1.8uF	$\leq 0.0005$	13.5	31.5	0.8	38	7.5uF	$\leq 0.0005$	20.5	46	0.8	38
2.0uF	$\leq 0.0005$	14	31.5	0.8	38	8.0uF	$\leq 0.0005$	21	46	0.8	38
2.2uF	$\leq 0.0005$	14.5	31.5	0.8	38	8.2uF	$\leq 0.0005$	21	46	0.8	38
2.4uF	$\leq 0.0005$	15.5	31.5	0.8	38	9.1uF	$\leq 0.0005$	22.5	46	0.8	38
2.5uF	$\leq 0.0005$	15.5	31.5	0.8	38	10uF	$\leq 0.0005$	23	46	1.0	38
2.7uF	$\leq 0.0005$	16	31.5	0.8	38	11uF	$\leq 0.0005$	24.5	46	1.0	38
3.0uF	$\leq 0.0005$	17	31.5	0.8	38	12uF	$\leq 0.0005$	25	46	1.0	38
3.3uF	$\leq 0.0005$	17.5	31.5	0.8	38	13uF	$\leq 0.0005$	26	46	1.0	38
3.5uF	$\leq 0.0005$	18	31.5	0.8	38	14uF	$\leq 0.0005$	27	46	1.0	38
3.6uF	$\leq 0.0005$	18.5	31.5	0.8	38	15uF	$\leq 0.0008$	28	46	1.0	38
3.9uF	$\leq 0.0005$	19	31.5	0.8	38	16uF	$\leq 0.0008$	29	46	1.0	38
4.0uF	$\leq 0.0005$	19	31.5	0.8	38	18uF	$\leq 0.0008$	30.5	46	1.0	38
4.3uF	$\leq 0.0005$	19.5	31.5	0.8	38	20uF	$\leq 0.0008$	32	46	1.0	38
4.5uF	$\leq 0.0005$	20	31.5	0.8	38	22uF	$\leq 0.0008$	33.5	46	1.0	38
4.7uF	$\leq 0.0005$	20.5	31.5	0.8	38	24uF	$\leq 0.0008$	35	46	1.0	38
5.0uF	$\leq 0.0005$	21	31.5	0.8	38	27uF	$\leq 0.0008$	37	46	1.0	38

## Supreme Metallized Polypropylene Film Capacitors – Axial – JPX

μF	250V					μF	250V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
28uF	≤0.0008	34	56	1.0	38	51uF	≤0.0010	43.5	61	1.0	38
30uF	≤0.0008	35	56	1.0	38	55uF	≤0.0010	45	61	1.0	38
33uF	≤0.0008	36.5	56	1.0	38	56uF	≤0.0010	46	61	1.0	38
36uF	≤0.0008	38	56	1.0	38	62uF	≤0.0010	48	61	1.0	38
39uF	≤0.0008	39.5	56	1.0	38	68uF	≤0.0010	39.5	61	1.0	38
41uF	≤0.0010	40.5	56	1.0	38	75uF	≤0.0010	42	61	1.0	38
43uF	≤0.0010	41.5	56	1.0	38	82uF	≤0.0010	43.5	61	1.0	38
45uF	≤0.0010	41	61	1.0	38	91uF	≤0.0014	45.5	61	1.0	38
47uF	≤0.0010	42	61	1.0	38	100uF	≤0.0014	46	61	1.0	38
50uF	≤0.0010	43	61	1.0	38	--	--	--	--	--	--

μF	400V					μF	400V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
1.0uF	≤0.0005	14.5	25	0.8	38	7.0uF	≤0.0005	23.5	46	0.8	38
1.1uF	≤0.0005	13	31.5	0.8	38	7.5uF	≤0.0005	24	46	0.8	38
1.2uF	≤0.0005	13.5	31.5	0.8	38	8.0uF	≤0.0005	25	46	0.8	38
1.3uF	≤0.0005	14	31.5	0.8	38	8.2uF	≤0.0005	25.5	46	0.8	38
1.5uF	≤0.0005	14.5	31.5	0.8	38	9.1uF	≤0.0005	26.5	46	0.8	38
1.6uF	≤0.0005	15	31.5	0.8	38	10uF	≤0.0005	28	46	1.0	38
1.8uF	≤0.0005	16	31.5	0.8	38	11uF	≤0.0005	29.5	46	1.0	38
2.0uF	≤0.0005	16.5	31.5	0.8	38	12uF	≤0.0005	30.5	46	1.0	38
2.2uF	≤0.0005	17.5	31.5	0.8	38	13uF	≤0.0005	31.5	46	1.0	38
2.4uF	≤0.0005	18	31.5	0.8	38	14uF	≤0.0005	32.5	46	1.0	38
2.5uF	≤0.0005	18.5	31.5	0.8	38	15uF	≤0.0008	33.5	46	1.0	38
2.7uF	≤0.0005	19	31.5	0.8	38	16uF	≤0.0008	31	56	1.0	38
3.0uF	≤0.0005	20	31.5	0.8	38	18uF	≤0.0008	33	56	1.0	38
3.3uF	≤0.0005	20.5	31.5	0.8	38	20uF	≤0.0008	34.5	56	1.0	38
3.5uF	≤0.0005	21	31.5	0.8	38	22uF	≤0.0008	36.5	56	1.0	38
3.6uF	≤0.0005	21.5	31.5	0.8	38	24uF	≤0.0008	38	56	1.0	38
3.9uF	≤0.0005	22.5	31.5	0.8	38	27uF	≤0.0008	40	56	1.0	38
4.0uF	≤0.0005	22.5	31.5	0.8	38	28uF	≤0.0008	41	56	1.0	38
4.3uF	≤0.0005	23.5	31.5	0.8	38	30uF	≤0.0008	42	56	1.0	38
4.5uF	≤0.0005	24	31.5	0.8	38	33uF	≤0.0008	44	56	1.0	38
4.7uF	≤0.0005	19.5	46	0.8	38	36uF	≤0.0008	46	56	1.0	38
5.0uF	≤0.0005	20	46	0.8	38	39uF	≤0.0008	48	56	1.0	38
5.1uF	≤0.0005	20	46	0.8	38	41uF	≤0.001	47	61	1.0	38
5.6uF	≤0.0005	21	46	0.8	38	43uF	≤0.001	48	61	1.0	38
6.0uF	≤0.0005	22	46	0.8	38	45uF	≤0.001	49	61	1.0	38
6.2uF	≤0.0005	22	46	0.8	38	47uF	≤0.001	50	61	1.0	38
6.8uF	≤0.0005	23	46	0.8	38	--	--	--	--	--	--

## Supreme Metallized Polypropylene Film Capacitors – Axial – JPX

μF	630V					μF	630V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
1.0uF	≤0.0005	16	31.5	0.8	38	5.0uF	≤0.0005	26.5	46	0.8	38
1.1uF	≤0.0005	16.5	31.5	0.8	38	5.1uF	≤0.0005	27	46	0.8	38
1.2uF	≤0.0005	17	31.5	0.8	38	5.6uF	≤0.0005	28	46	0.8	38
1.3uF	≤0.0005	17.5	31.5	0.8	38	6.0uF	≤0.0005	29	46	0.8	38
1.5uF	≤0.0005	18	31.5	0.8	38	6.2uF	≤0.0005	29	46	0.8	38
1.6uF	≤0.0005	19.5	31.5	0.8	38	6.8uF	≤0.0005	30.5	46	0.8	38
1.8uF	≤0.0005	20.5	31.5	0.8	38	7.0uF	≤0.0005	31	46	0.8	38
2.0uF	≤0.0005	21.5	31.5	0.8	38	7.5uF	≤0.0005	32	46	0.8	38
2.2uF	≤0.0005	22.5	31.5	0.8	38	8.0uF	≤0.0005	33	46	0.8	38
2.4uF	≤0.0005	23.5	31.5	0.8	38	8.2uF	≤0.0005	33.5	46	0.8	38
2.5uF	≤0.0005	24	31.5	0.8	38	9.1uF	≤0.0005	35	46	0.8	38
2.7uF	≤0.0005	25.5	31.5	0.8	38	10.0uF	≤0.0005	32.5	56	1.0	38
3.0uF	≤0.0005	20.5	46	0.8	38	11.0uF	≤0.0005	34	56	1.0	38
3.3uF	≤0.0005	21.5	46	0.8	38	12.0uF	≤0.0005	35.5	56	1.0	38
3.5uF	≤0.0005	22	46	0.8	38	13.0uF	≤0.0005	37	56	1.0	38
3.6uF	≤0.0005	22.5	46	0.8	38	14.0uF	≤0.0005	38	56	1.0	38
3.9uF	≤0.0005	23.5	46	0.8	38	15.0uF	≤0.0008	39.5	56	1.0	38
4.0uF	≤0.0005	24	46	0.8	38	16.0uF	≤0.0008	40.5	56	1.0	38
4.3uF	≤0.0005	25	46	0.8	38	18.0uF	≤0.0008	43	56	1.0	38
4.5uF	≤0.0005	25.5	46	0.8	38	20.0uF	≤0.0008	45.5	56	1.0	38
4.7uF	≤0.0005	26	46	0.8	38	--	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.