




1. US-3160A



● Electro-Acoustical SPEC

• Outer Dimension	Ø31.5 x T23.6 mm	
• Net Weight	8.0 ± 1g	
• Impedance	60Ω ± 5%	at 2kHz, 1Vrms
• Sound Pressure Level(SPL)	86dB ± 5dB at 1kHz	at 0.17W, 0.1 m, Sine wave
• Rated/Max Input Power	0.17W / 0.32W	
• Resonance Frequency(Fo)	815Hz ± 100Hz	at 1Vrms
• Operation Temperature	-40°C ~ +85°C	

● Frequency Response Curve

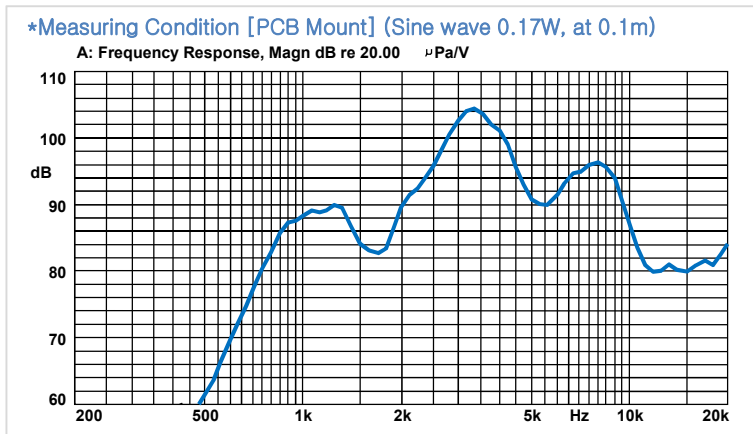

● Mechanical Dimension

