




7. US-3430Z



● Electro-Acoustical SPEC

• Outer Dimension	Ø33.8 x T7 mm	
• Net Weight	7.5 ± 1g	
• Impedance	28Ω ± 4Ω	at 2kHz, 0.5Vrms
• Sound Pressure Level(SPL)	93dB ± 3dB at 800Hz 92dB ± 3dB at 1.3kHz	at 0.2W, 0.1 m, Sine wave
• Rated/Max Input Power	0.2W / 0.4W	
• Resonance Frequency(Fo)	500Hz ±20%	at 1Vrms
• Operation Temperature	-40°C ~ +105°C	

● Frequency Response Curve

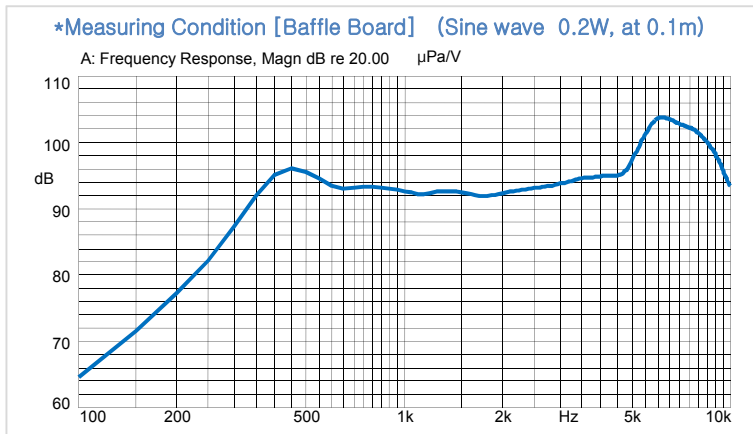

● Mechanical Dimension

