




4. US-3745A



● Electro-Acoustical SPEC

• Outer Dimension	Ø37 x T11 mm	
• Net Weight	8.9 ± 1g	
• Impedance	45Ω ± 10%	at 1kHz, 0.3Vrms
• Sound Pressure Level(SPL)	90dB ± 3dB at 1kHz	at 0.2W, 0.1 m, Sine wave
• Rated/Max Input Power	0.2W / 0.4W	
• Resonance Frequency(Fo)	430Hz ± 15%	at 1Vrms
• Operation Temperature	-40°C ~ +105°C	

● Frequency Response Curve

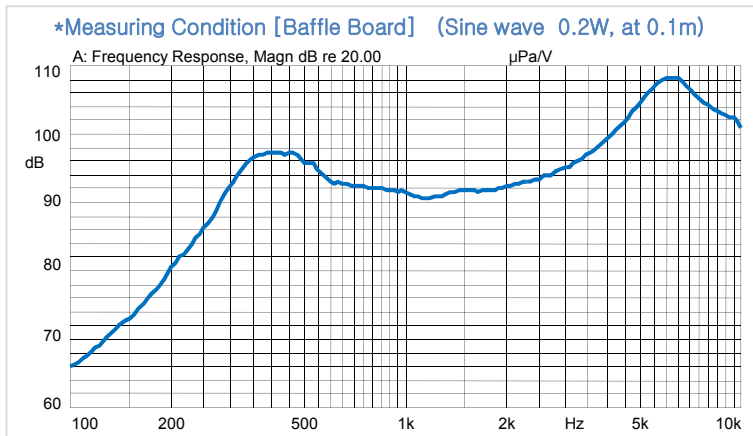

● Mechanical Dimension

