




8. US-4008J



● Electro-Acoustical SPEC

• Outer Dimension	Ø40 x T10.8(12.1) mm	
• Net Weight	13.0 ± 1g	
• Impedance	8Ω ± 1Ω	at 2kHz, 1Vrms
• Sound Pressure Level(SPL)	103dB ± 3dB at 1.3kHz	at 1W, 0.1 m, Sine wave
• Rated/Max Input Power	1W / 1.5W	
• Resonance Frequency(Fo)	600Hz ± 20%	at 1Vrms
• Operation Temperature	-40°C ~ +105°C	

● Frequency Response Curve

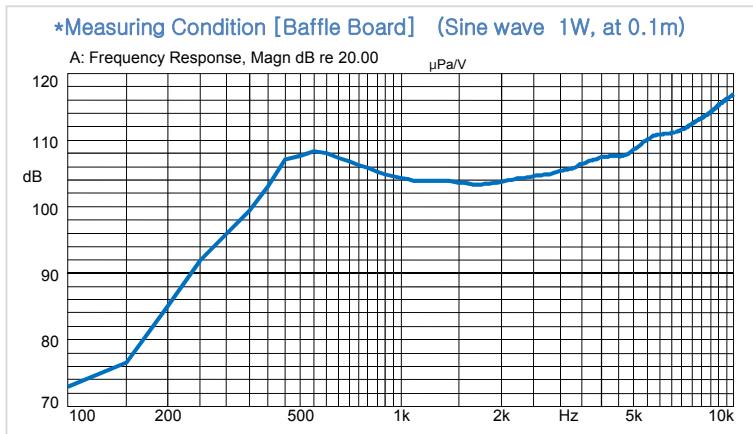

● Mechanical Dimension

